

### Better Document Collaboration

WebODF and Manticore

Presented by Aditya Bhatt 15/07/2015

## What is WebODF?





```
tevet= Z | nodeId= II >...</text:n>
                                                                            ▼ <text:list xml:id="list21124591
                                                                            text:style-name="L2" counter-id=
                                                                            "Ylist211245917968812220-level1-
                                                                             ▼ <text:list-item>
                                                                               ▼ <text:p text:style-name="P3</p>
                                                                                   ::before
                                                                                   <anchor memberId="localus</pre>
                                                                                   "roject at
                                                                                   <text:a xlink:type="simple
                                                                                   webodf.org/">http://webod
                                                                                 </text:p>
100% client-side rendering
                                                                               </text:list-item>
                                                                             ▶ <text:list-item>...</text:list-
                                                                            </office:text>
                                                                          </office:body>
                                                                        </document>
                                                                        <div id="annotationsPane"></div>
                                                                      <svg class="webodf-selectionOverlay"</p>
                                                                      style="display: none;">...</svg>
                                                                      ▶ <div editinfo:memberid="localuser" c</p>
                                                                      caretOverlay" style="height: 20.999981
                                                                      787.51564754564px; left: 357.328112855
                                                            ... div document office:body office:text text:list te
                                                            Styles Event Listeners DOM Breakpoints Properties 5
                                                            Console Search Emulation Rendering
```



```
tevet= z | nodeid= ii >...</text:n>
                 ▼ <text:list xml:id="list21124591
                 text:style-name="L2" counter-id=
                 "Ylist211245917968812220-level1-
                   ▼ <text:list-item>
                     ▼ <text:p text:style-name="P3</p>
                        ::before
                        <anchor memberId="localus</pre>
                        "roject at
                        <text:a xlink:type="simple
                        webodf.org/">http://webod
                        11 1 11
                      </text:p>
                    </text:list-item>
                   ▶ <text:list-item>...</text:list-
                   ▶ <text:list-item>...</text:list-</pre>
                  </text:list>
                </office:text>
              </office:body>
            </document>
             <div id="annotationsPane"></div>
           <svg class="webodf-selectionOverlay"</p>
           style="display: none;">...</svg>
           ▶ <div editinfo:memberid="localuser" c</p>
           caretOverlay" style="height: 20.999981
           787.51564754564px; left: 357.328112855
... div document office:body office:text text:list te
Styles Event Listeners DOM Breakpoints Properties 5
```

## Embed anywhere



Console Search Emulation Rendering

```
tevet= z nodelu= li >...</text:n>
                 ▼ <text:list xml:id="list21124591
                 text:style-name="L2" counter-id=
                 "Ylist211245917968812220-level1-
                  ▼ <text:list-item>
                     ▼ <text:p text:style-name="P3</p>
                        ::before
                        <anchor memberId="localus</pre>
                        "roject at
                        <text:a xlink:type="simple
                        webodf.org/">http://webod
                        11 1 11
                      </text:p>
                    </text:list-item>
                  ▶ <text:list-item>...</text:list-
                  ▶ <text:list-item>...</text:list-</pre>
                  </text:list>
                </office:text>
              </office:body>
            </document>
            <div id="annotationsPane"></div>
           <svg class="webodf-selectionOverlay"</p>
           style="display: none;">...</svg>
           ▶ <div editinfo:memberid="localuser" c</p>
           caretOverlay" style="height: 20.999981
           787.51564754564px; left: 357.328112855
... div document office:body office:text text:list te
Styles Event Listeners DOM Breakpoints Properties 5
```

## Roundtrip consistency



Console Search Emulation Rendering

```
tevet= z nodelu= li >...</text:n>
                                                                            ▼ <text:list xml:id="list21124591
                                                                            text:style-name="L2" counter-id=
                                                                            "Ylist211245917968812220-level1-
                                                                              ▼ <text:list-item>
                                                                                ▼ <text:p text:style-name="P3</p>
                                                                                   ::before
                                                                                   <anchor memberId="localus</pre>
                                                                                   "roject at
                                                                                   <text:a xlink:type="simple
                                                                                   webodf.org/">http://webod
                                                                                   11 11 11
                                                                                 </text:p>
                                                                               </text:list-item>
Easy to implement features
                                                                            ▶ <text:list-item>...</text:list-</pre>
                                                                              </text:list>
                                                                            </office:text>
                                                                          </office:body>
                                                                        </document>
                                                                        <div id="annotationsPane"></div>
                                                                      <svg class="webodf-selectionOverlay"</p>
                                                                      style="display: none;">...</svg>
                                                                      ▶ <div editinfo:memberid="localuser" c</p>
                                                                      caretOverlay" style="height: 20.999981
                                                                      787.51564754564px; left: 357.328112855
                                                            ... div document office:body office:text text:list te
                                                            Styles Event Listeners DOM Breakpoints Properties 5
                                                            Console Search Emulation Rendering
```




## ViewerJS





### Editor

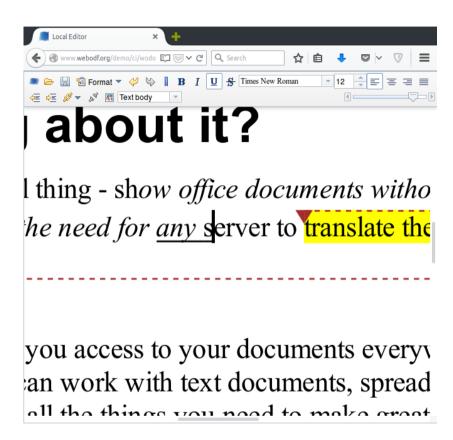

## ... built with Wodo Components



#### Introducing

# Manticore

from Kolab Systems



# Manticore

100% free software



## Manticore

Basically ... Etherpad, but backed by a proper document format



# Concurrency

## Real time editing with many others





### Conflict Resolution

Intelligent and interruption-free using operational transformations





## Modular and Interoperable

Storage and authentication implemented in modular backends





### Current Backends

Storage: WebDav

Authentication: LDAP





# Your Way

On your own Intranet ...
Integrated with other applications ...
Wherever and however you want!



## Demo Time!









### Manticore and Kolab

Deep integration with Roundcube files
Seamless collaboration in email threads
Invites that use calendars and messaging





COLLABORATE IN CONFIDENCE

kolabsystems.com